


UCHIDA

TABLETOP BANDING MACHINES
TAPIT SERIES

TAPIT WXII / TAPIT WII+ / TAPIT PETIT
TAPIT 50W / TAPIT WS

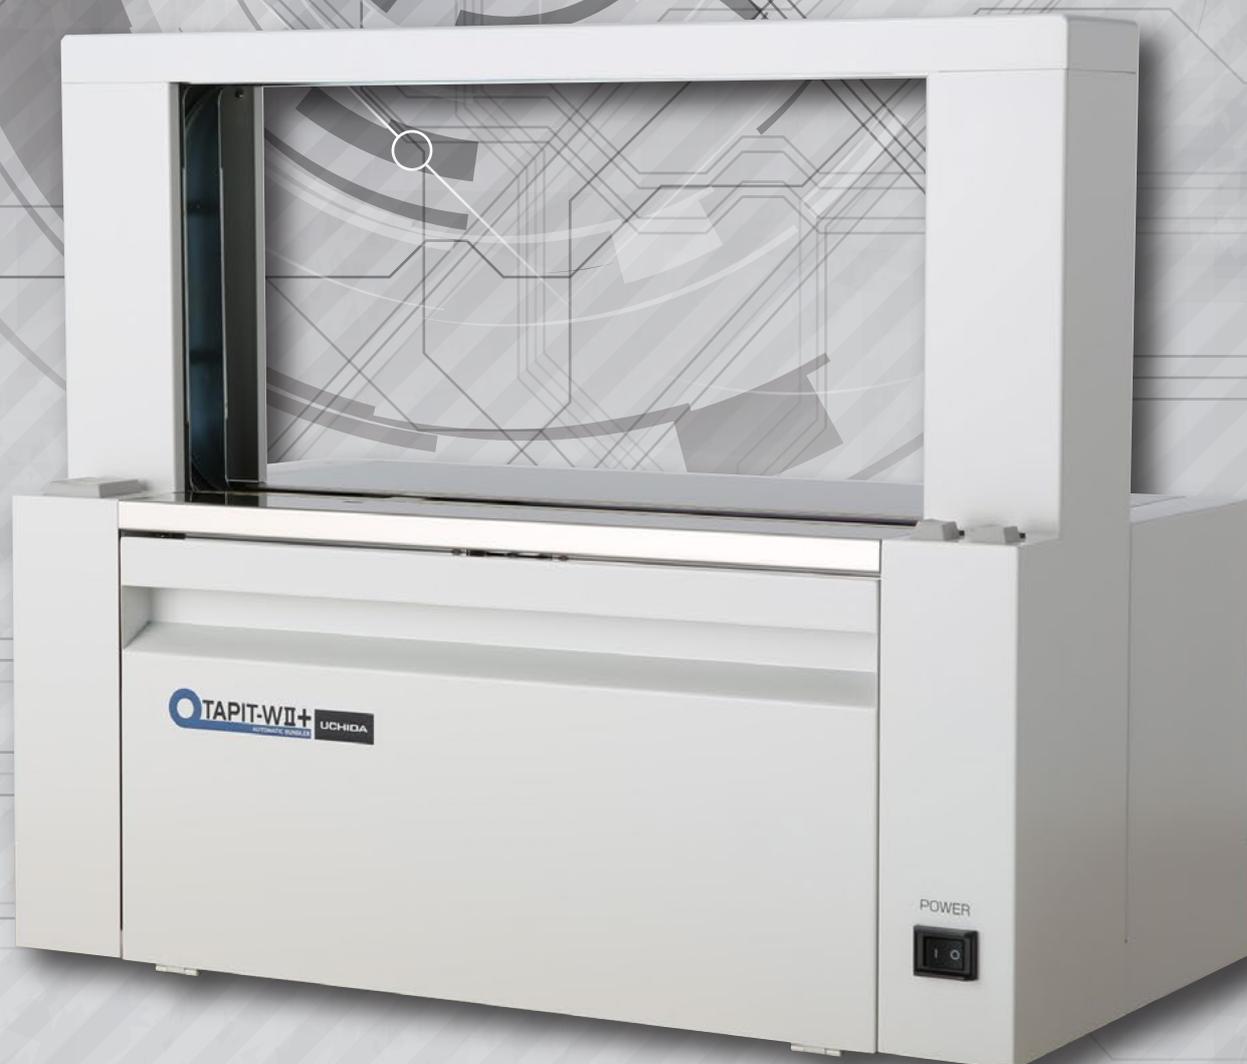

Tapit WXII

Flagship bundling machine Smooth, consistent and fast

- For 30mm width tape
- Easy operation
- No ready time
- Machine processes up to 33 products/min.
- Paper and film bands applicable
- Slim sealing plate for smallest products
- Band tension from 5 - 60 N (1N=0.1kgf)
- Added-value functions such as pause function to prevent miss-bundle and squeezing function to bundle soft materials

Uchida's advanced technology allows it to load thinner 60 μ film tape, which reduce running costs.



Tapit WII+

Standard tabletop bundler Loved for decades, all over the world

- For 30mm width tape
- Easy operation and user friendly
- No ready time
- Machine processes up to 26 products/min.
- Band tension from 5 - 20 N (1N=0.1kgf)
- Paper and film bands applicable
- Short front table for small formats

Tapit-WII+ has been Uchida's best-selling bundler for decades. Although Tapit-WII+ is the standard model, decades of experiences and numbers of upgrades made it modern and sophisticated.



Tapit petit

Small entry model bundler Simple, compact and yet high quality

- For 30mm width tape
- Easy and quick operation
- No ready time
- Machine processes up to 26 products/min.
- Band tension from 5 - 20 N (1N=0.1kgf)
- Paper and film bands applicable
- Short front table for small formats

For its small footprint, Tapit-Petit fits any workspaces and offices. Great solution to bundle smaller items, such as bank notes, vouchers, business cards, photo cards, greetings cards etc.



Tapit 50W

Bundler for 50mm width tape

- For 50mm width tape
- Easy operation
- No ready time
- Machine processes up to 24 products/min.
- Band tension from 5 - 20 N (1N=0.1kgf)
- Paper and film bands applicable
- Short front table for small formats
- User friendly and low maintenance



Tapit WS

Bundler for 20mm width tape

- For 20mm width tape
- Easy operation
- No ready time
- Machine processes up to 25 products/min.
- Band tension from 5 - 20 N (1N=0.1kgf)
- Paper and film bands applicable
- Short front table for small formats
- User friendly and low maintenance
- Easy temperature & tension adjustment



Tape dispenser stand (For Tapit WII+)

Adds mobility to your machine

The optional Dispenser Stand adds mobility to your machine, while meeting the needs of higher production. You'll have all the advantages of running larger rolls of material with less roll changes and material cost savings.



Consumable / Options / Accessories



Kraft paper tape White paper tape Magic-cut tape Transparent film tape



Auxiliary guide for soft materials helps bundling such as envelopes, letter papers etc. (For Tapit WXII, WII+)

Sample of budling applications



Bundling optimize your workflow in graphic, food, packaging, logistics, pharmaceutical and more industries.



Auxiliary guide for small materials is a great solution for bundling business cards, tags, labels etc. (For Tapit-WXII, WII+)



Foot switch for all models.



Optional AU device (I/O interface) helps automation.

Specifications

Model		Tapit WXII	Tapit WII+	Tapit Petit	Tapit 50W	Tapit WS
Bundling size	Maximum	420(W)x210(H)mm /16.54"x8.27"	400(W)x200(H)mm /15.7"x7.9"	240(W)x170(H)mm /9.45"x4.69"	400(W)x200(H)mm /15.7"x7.9"	380(W)x170(H)mm /15.0"x6.7"
	Minimum	30(W)x10(H)mm/1.18"x0.39"				
Bundling speed		Up to 33 bundles/min.	Up to 26 bundles/min.	Up to 26 bundles/min.	Up to 24 bundles/min.	Up to 25 bundles/min.
Bundling tension		5-60N (1N=0.1kgf)	5-20N (1N=0.1kgf)	5-20N (1N=0.1kgf)	5-20N (1N=0.1kgf)	5-20N (1N=0.1kgf)
Tape width		30mm/1.18"			50mm/1.97"	20mm/0.79"
Tape length *with dispenser stand	Kraft tape(Brown)	190m(623ft)	190m(623ft) / 800m(2,624ft)*	190m(623ft)	190m(623ft) / 800m(2,624ft)*	190m(623ft)
	Kraft tape(White)	190m(623ft)	190m(623ft) / 800m(2,624ft)*	190m(623ft)	190m(623ft)	-
	Film tape 110μ	200m(656ft)	200m(656ft) / 800m(2,624ft)*	200m(656ft)	200m(656ft) / 1000m(3,280ft)*	200m(656ft)
	Film tape 80μ	200m(656ft)	200m(656ft)	200m(656ft)	-	-
	Film tape 60μ	370m(1,214ft)	-	370m(1,214ft)	-	-
Power Supply		110/120/220/230/240VAC, 50/60Hz 260W, single phase			110/120/220/230/240VAC, 50Hz or 60Hz 200W, single phase	
Net weight		28kgs/64lbs	32kgs/71 lbs	32kgs/71lbs	43kgs/95lbs	37kgs/82lbs
Dimensions		560(W)x300(D)x490(H)mm 22.4"x11.8"x19.3"	560(W)x300(D)x490(H)mm 22.0"x11.8"x19.3"	382(W)x300(D)x452(H)mm 15.0"x11.8"x17.8"	560(W)x330(D)x490(H)mm 22.0"x13.0"x19.3"	520(W)x300(D)x425(H)mm 20.5"x11.8"x17.8"
Functions	Pause	X	-	-	-	-
	Squeeze	X	-	-	-	-
	Soft bundling	X	-	-	-	-
Options	Foot switch	X	X	X	X	X
	Dispenser stand*	-	X	-	-	-
	Soft/small bundle guide	X	X	X	-	X *exclusive
	AU device (I/O interface)	X	X	-	-	-

Specifications are subject to change without notice.

UCHIDA YOKO GLOBAL CO.,LTD.

4-7 Shinkawa 2-Chome, Chuo-ku Tokyo, Japan
 Tel: +81(3)3555 4781 Fax: +81(3)3555 6423
 Email: sales@uchidayoko.com Website: www.uchida-machinery.com