

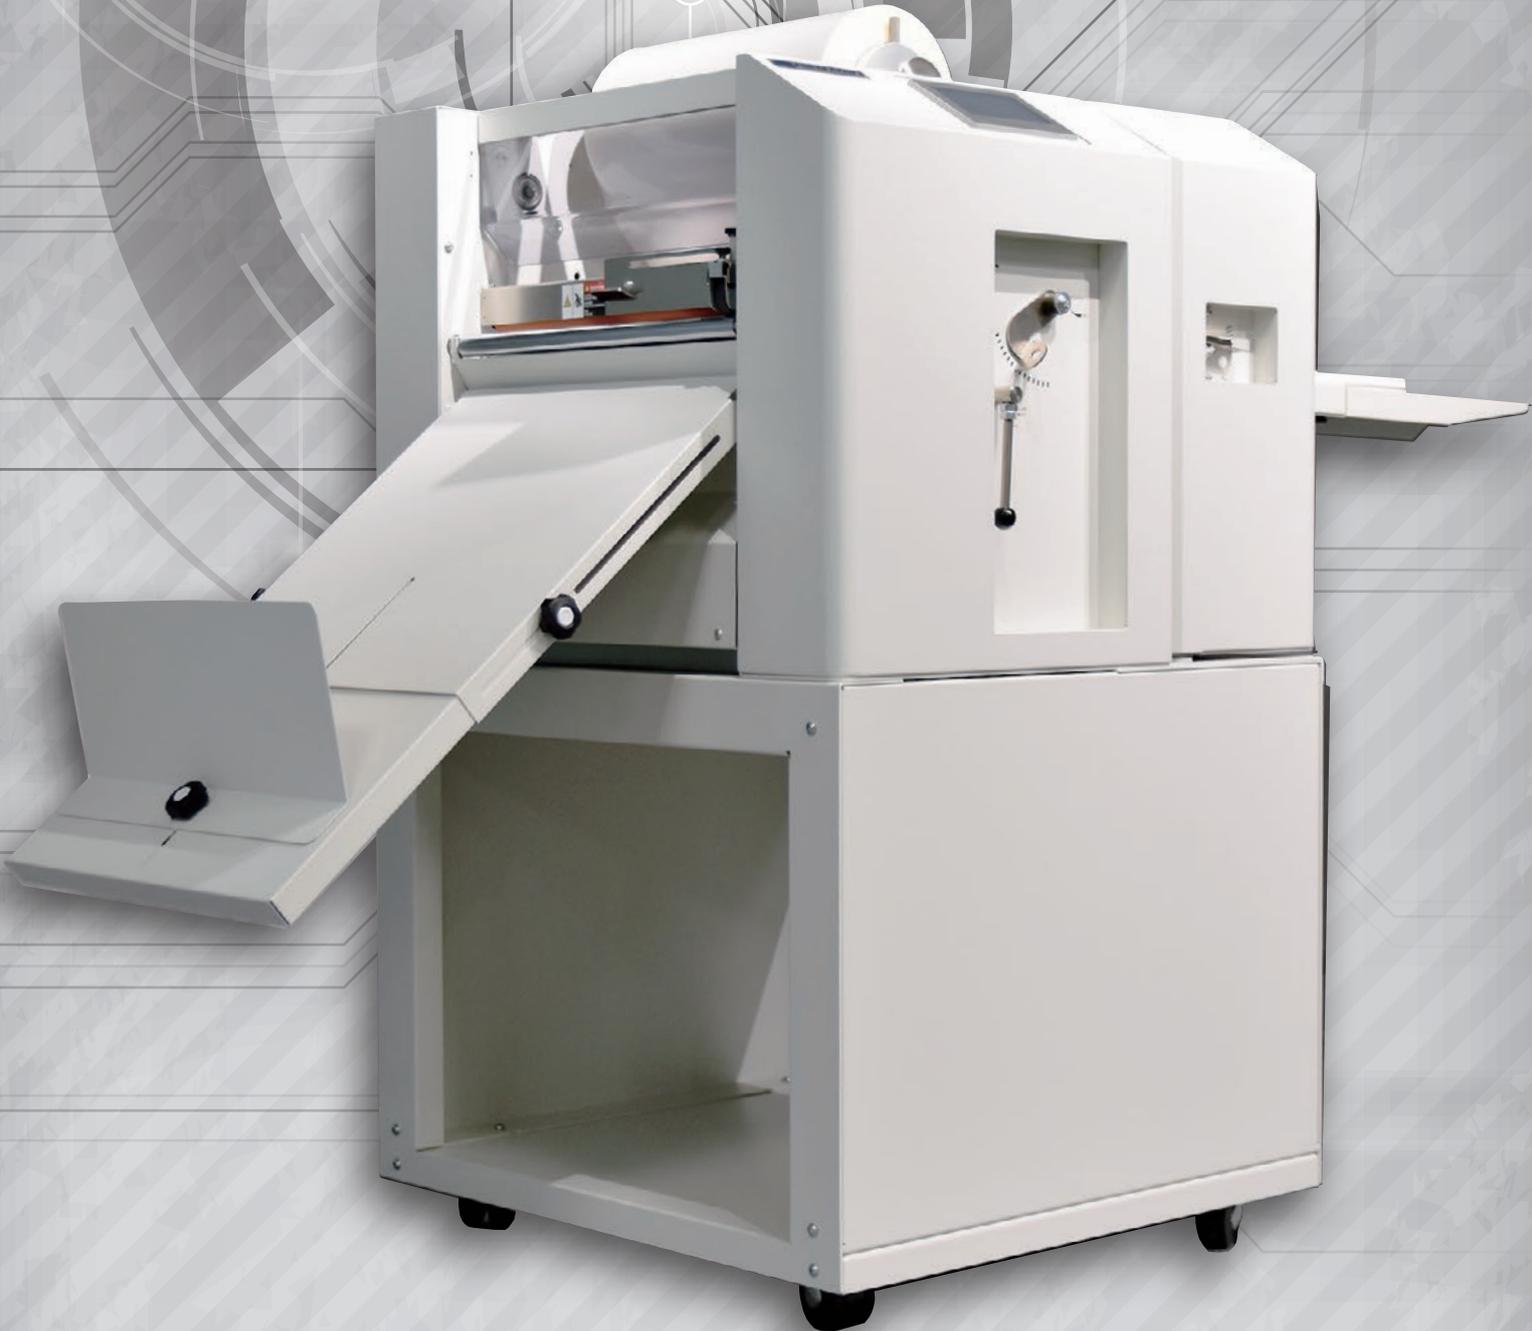


**UCHIDA**

# UCHIDA LAMINATOR & FOIL FUSER FOILGLAZER II

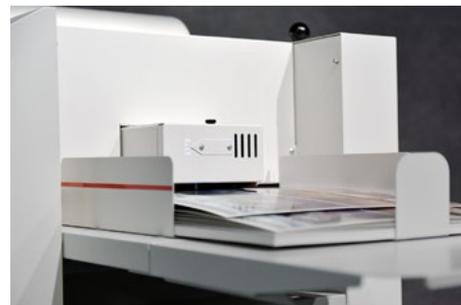

# The best features of Uchida Foilglazer II

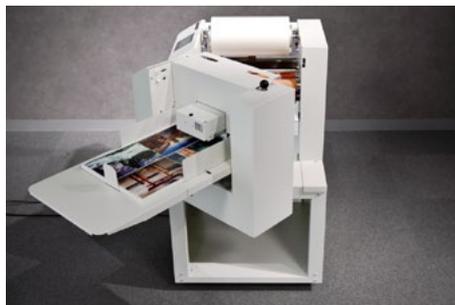

## Laminating & Foil fusing in one box.


Foilglazer II is the compact and robust laminating & foil fusing machine. It accommodates papers up to 365x600mm in size. Ideal for laminating and embellishing digitally printed, short run jobs.

## Easy setting, intuitive operation.

Foilglazer II has a feeder that can be unfolded. This makes film setting and regular maintenance easy. The touch screen control is very intuitive to operate.

## Automatic air suction feeding.

Thanks to Uchida's air suction feeding technology, Foilglazer II can feed a wide variety of prints consistently. The feeder can take stocks from 110gsm to 400gsm in weight.

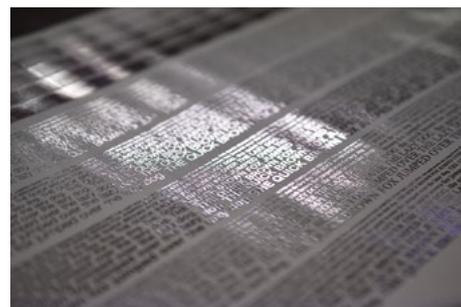

## Enhance your productivity.

The maximum driving speed of the Foilglazer II is 5m/min. Thanks with the automatic film cutting mechanism, operator can walk away once the machine is started.

## Perfect laminating on digital prints.

Foilglazer II takes a variety of laminating films commonly used in the markets, including films for digital print, soft touch films and anti-scuff films.

## On-demand foil fusing.

Using gold/silver foil rolls, the machine can "foilglaze" (foil fusing) on black toners. This is an ideal way to add values on digital, short-run, on-demand applications.

## Specifications

<b>Functions</b>	Laminating and foilglazing (foil fusing)
<b>Features</b>	Empty feed detection, Double feed detection by reading length, Film end detection, Decurler roller equipped
<b>Feedable paper size</b>	Laminating: 297(W)x210(L) - 365(W)x600(L) mm (11.69"x8.26" - 14.37"x23.62") Foilglazing: 148(W)x210(L) - 365(W)x600(L) mm (5.82"x8.26" - 14.37"x23.62")
<b>Paperweight</b>	110 - 400 gsm* (32lb bond - 150lb cover)
<b>Paper quality</b>	Coated paper, Art paper, Fine quality paper etc. *Please validate some sheets to check the results before production.
<b>Feeding mechanism</b>	Upper belt air suction feed + center blower *Side blowers are optional
<b>Operation</b>	4.3" color touch screen, Inching switch (forward/backward) Pressure roller lifting lever.
<b>Feed tray capacity</b>	50 mm (2")
<b>Delivery speed</b>	Laminating: 5 m/min. (16.4'/min.) Foilglazing: 3 m/min. (9.84'/min.)
<b>Usable film (Laminating)</b>	Width: 200 - 340 mm (7.87" - 13.38") / Outer diameter: Up to 200 mm (7.87") Thickness: 20 - 45 micron / Core diameter: 1 inch (26 mm) or 3 inch (76 mm)
<b>Usable film (Foilglazing)</b>	Width: 316 - 330 mm (12.44" - 13") / Outer diameter: Up to 60 mm (2.36") Core diameter: 1 inch (26 mm)
<b>Laminating method</b>	Heat roller + Quartz tube heater
<b>Warm up time</b>	less than 10 min.
<b>Roller temperature</b>	Off / 60 - 160 °C (176 - 320 °F)
<b>Roller pressure</b>	Pneumatic
<b>Required compressor</b>	Discharge amount more than 5.0 L/min, Tank capacity more than 5.0 L, Tube diameter 6mm, Minimum pressure 0.6 MPa
<b>Separation method</b>	Burst cutting
<b>Dimensions</b>	Main body: 582(W)x621(D)x1230(H) mm (22.9"x24.45"x47.48") With feed & delivery table: 1,730(W)x621(D)x1,230(H) mm (67.6"x24.45"x47.48")
<b>Weight</b>	115 kgs
<b>Power source</b>	100-120 VAC or 220-240 VAC 50/60 Hz, single phase
<b>Power consumption</b>	1,000 W
<b>Options</b>	Machine table, Ultrasonic double feed sensor, Dust removal roller, Side blowers for feeder, Laminating film slitter.

\*Production rates are based on optimal operating conditions and may vary depending on stock and environmental conditions.  
\*As part of our continuous product improvement program, specifications are subject to change without notice.

## Consumables

	Descriptions
<b>Luxefoil Gold Metallic</b>	Metallic gold. 320 mm (12.6") width, 120 M (393.7') length, 2 rolls/box
<b>Luxefoil Silver Metallic</b>	Metallic silver. 320 mm (12.6") width, 120 M (393.7') length, 2 rolls/box
<b>Luxefoil Gold Matt</b>	Matt gold. 320 mm (12.6") width, 120 M (393.7') length, 2 rolls/box
<b>Luxefoil Silver Matt</b>	Matt silver. 320 mm (12.6") width, 120 M (393.7') length, 2 rolls/box

## UCHIDA YOKO GLOBAL CO.,LTD.

4-7 Shinkawa 2-Chome, Chuo-ku Tokyo, Japan

Tel: +81(3)3555 4781 Fax: +81(3)3555 6423

Email: sales@uchidayoko.com Website: www.uchida-machinery.com